DOOR SCHEDULE											
			DOOR			FRAME					
Door No.	Door Size	F.R.	Elev.	Mat'l	Fin.	Type	Mat'l	Fin.	Hdwr. Set	NOTES	Door No.
0	3'-0" x 7'-0" PAIR		FG2	ALUM	PNT	AL-	ALUM	PNT	(none)		0
77	3'-0" x 7'-0"		F	WD	STN	HM-1	HM	PNT	(none)		77
100A	3'-0" x 7'-0" PAIR		FG2	ALUM	PNT	AL-	ALUM	PNT	(none)		100A
100B									(none)		100B
104	3'-0" x 8'-0"		F	WD	STN	HM-1	HM	PNT	(none)		104
105	3'-0" x 8'-0"		F	WD	STN	HM-1	HM	PNT	(none)		105
105B	3'-0" x 7'-0"		F	WD	STN	HM-1	HM	PNT	(none)		105B
106	3'-0" x 7'-0"		F	WD	STN	HM-1	HM	PNT	(none)		106
112A	3'-0" x 7'-0"		F	WD	STN	HM-1	HM	PNT	(none)		112A
113	3'-0" x 7'-0"		F	WD	STN	HM-1	HM	PNT	(none)		113
114	3'-0" x 7'-0"		F	WD	STN	HM	HM	PNT	(none)		114
115	3'-0" x 7'-0"		F	WD	STN	HM	HM	PNT	(none)		115
116	3'-0" x 7'-0"		F	WD	STN	HM	HM	PNT	(none)		116
117	3'-0" x 7'-0" PAIR		F	WD	STN	HM	HM	PNT	(none)		117
211	3'-0" x 8'-0"		F	WD	STN	HM-1	HM	PNT	(none)		211
212	3'-0" x 8'-0"		F	WD	STN	HM-1	HM	PNT	(none)		212
213	3'-0" x 8'-0"		FG2	ALUM	PNT	AL-36	ALUM	PNT	(none)		213
403									(none)		403
404	3'-0" x 7'-0"		F	WD	STN	HM-1	HM	PNT	(none)		404

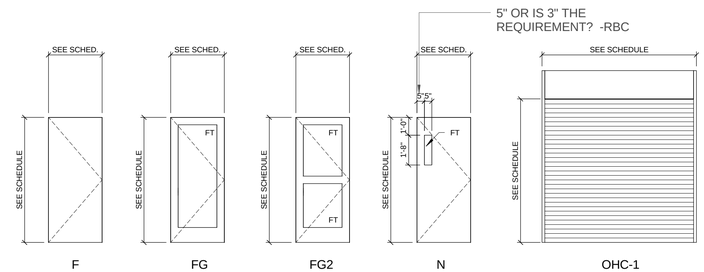

M8 DOOR TYPES

SCALE: 1/4" = 1'-0"

PROJECT CONSULTANTS

STRUCTURAL ENGINEER
NAME
ADDRESS
CITY, STATE, ZIP
T: 402.477.7340

MECHANICAL/ELECTRICAL ENGINEER
NAME
ADDRESS
Lincoln, NE 68508
T: 402.476.9273

CIVIL ENGINEER
NAME
ADDRESS
Lincoln, NE 68508
T: 402.474.5311

Bone Creek Museum of Agrarian Art

Bone Creek Musuem of Agrarian Art

PROJECT NO. 13001

RBC ARCHITECT
6191 N 14th St. Lincoln, NE 68521 T: 402 435 9203

HM Frame Types, Door Types, Door Schedules

KEY PLAN

GMP PACKAGE

NOT TO BE USED FOR CONSTRUCTION

7/16/2013 6:06:26 PM

A501

© Copyright RYAN BAKER CAMERON